



METAL FORM MANUFACTURING CO., INC
 5960 WEST WASHINGTON STREET
 PHOENIX, ARIZONA 85043
 TELEPHONE: 602-233-1211 FAX: 602-233-2033
 WEBSITE ADDRESS: WWW.MFMCA.COM

Model MFD-33 Counterbalanced Backdraft Damper Galvanized Steel

Specifications


- Frame:** Rollformed 16ga. Galvanized steel hat channel frame.
- Blades:** .050" Rollformed aluminum.
- Bearings:** Molded Nylon.
- Axles:** Zinc plated hex bearing pin.
- Counterweights:** Field adjustable within airstream.
- Linkage:** Plated steel brackets, 1/8" x 1/2" linkage bar.
- Max. Velocity:** 2000 FPM @ 1.5" w.g.
- Minimum size:** 6" w x 8" h single blade
8" w x 13" h multi-blade.
- Maximum size:** 40" w x 72" h.
Multiple section - unlimited size.

Options

- Flanged frame.
- Blade edge seals.
- Stainless steel construction.
- Sleeves.
- Various materials and gauges available, consult factory.
- Other options available, consult factory.

Notes

1. Width x height are nominal opening dimensions. Unless specified otherwise, panels will be constructed 1/4" undersize.
2. Metal Form reserves the right to improve design or change specifications at any time.

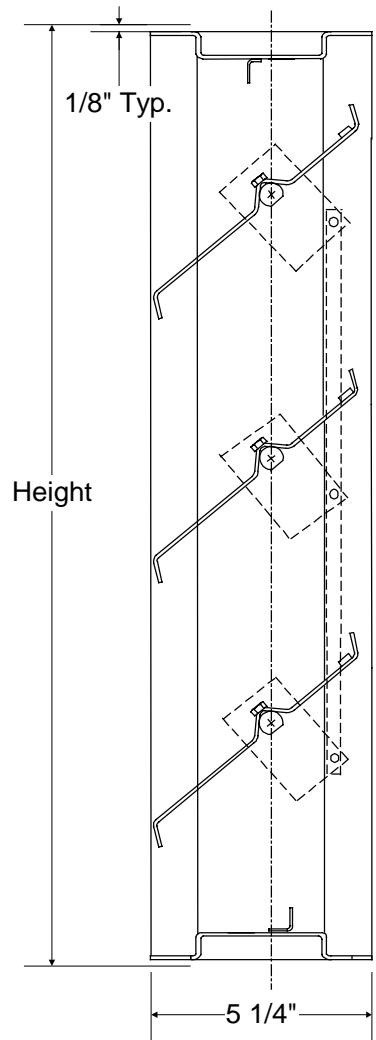

Tag	Qty.	Width	Height	No. of Panels (W x H)	Options	Finishes/Specify	Remarks

Project: _____
Architect: _____
Engineer: _____
Contractor: _____

Model MFD-33 Performance Data

PRESSURE DROP

